

## ZENworks Adaptive Agent Guide

# Novell® ZENworks 10 Configuration Management

**10.1**

August 6, 2008

[www.novell.com](http://www.novell.com)



## Legal Notices

Novell, Inc. makes no representations or warranties with respect to the contents or use of this documentation, and specifically disclaims any express or implied warranties of merchantability or fitness for any particular purpose. Further, Novell, Inc. reserves the right to revise this publication and to make changes to its content, at any time, without obligation to notify any person or entity of such revisions or changes.

Further, Novell, Inc. makes no representations or warranties with respect to any software, and specifically disclaims any express or implied warranties of merchantability or fitness for any particular purpose. Further, Novell, Inc. reserves the right to make changes to any and all parts of Novell software, at any time, without any obligation to notify any person or entity of such changes.

Any products or technical information provided under this Agreement may be subject to U.S. export controls and the trade laws of other countries. You agree to comply with all export control regulations and to obtain any required licenses or classification to export, re-export or import deliverables. You agree not to export or re-export to entities on the current U.S. export exclusion lists or to any embargoed or terrorist countries as specified in the U.S. export laws. You agree to not use deliverables for prohibited nuclear, missile, or chemical biological weaponry end uses. See the [Novell International Trade Services Web page \(http://www.novell.com/info/exports/\)](http://www.novell.com/info/exports/) for more information on exporting Novell software. Novell assumes no responsibility for your failure to obtain any necessary export approvals.

Copyright © 2007-2008 Novell, Inc. All rights reserved. No part of this publication may be reproduced, photocopied, stored on a retrieval system, or transmitted without the express written consent of the publisher.

Novell, Inc. has intellectual property rights relating to technology embodied in the product that is described in this document. In particular, and without limitation, these intellectual property rights may include one or more of the U.S. patents listed on the [Novell Legal Patents Web page \(http://www.novell.com/company/legal/patents/\)](http://www.novell.com/company/legal/patents/) and one or more additional patents or pending patent applications in the U.S. and in other countries.

Novell, Inc.  
404 Wyman Street, Suite 500  
Waltham, MA 02451  
U.S.A.  
[www.novell.com](http://www.novell.com)

*Online Documentation:* To access the latest online documentation for this and other Novell products, see [the Novell Documentation Web page \(http://www.novell.com/documentation\)](http://www.novell.com/documentation).

## **Novell Trademarks**

For Novell trademarks, see [the Novell Trademark and Service Mark list \(http://www.novell.com/company/legal/trademarks/tmlist.html\)](http://www.novell.com/company/legal/trademarks/tmlist.html).

## **Third-Party Materials**

All third-party trademarks are the property of their respective owners.



# Contents

<b>About This Guide</b>	<b>9</b>
<b>1 Overview</b>	<b>11</b>
<b>2 Status</b>	<b>13</b>
2.1 Viewing the Agent's Status	13
2.2 Registering with a Key	13
<b>3 Policies</b>	<b>15</b>
3.1 User-Assigned Versus Device-Assigned Policies	15
3.2 Viewing Policies	15
<b>4 Bundles</b>	<b>17</b>
4.1 Bundles Versus Applications	17
4.2 User-Assigned Versus Device-Assigned Bundles	17
4.3 Accessing Bundles	17
4.3.1 ZENworks Window	17
4.3.2 ZENworks Explorer	18
4.3.3 ZENworks Icon	19
4.4 Understanding Bundle Icons	20
4.5 Launching a Bundle	21
4.6 Postponing a Bundle Download	21
4.7 Verifying a Bundle	21
4.8 Viewing a Bundle's Properties	22
4.9 Uninstalling a Bundle	22
<b>5 Inventory</b>	<b>23</b>
5.1 What Is Inventory Information Used For?	23
5.2 Scanning the Device	23
5.3 Viewing Inventory Information	23
5.4 Completing a Collection Data Form	24
<b>6 Remote Management</b>	<b>25</b>
6.1 Remote Management Operations	25
6.2 Requesting a Remote Management Session	25
6.3 Viewing Currently Connected Remote Operators	26
6.4 Viewing the Remote Management Policy	26
6.5 Using the Security Settings	26
<b>7 Logging</b>	<b>29</b>
7.1 Changing the Logging Severity Level	29
7.2 Viewing the Local Log File	29

<b>8</b>	<b>Satellite Roles</b>	<b>31</b>
8.1	General Satellite Role Information . . . . .	31
8.2	Collection . . . . .	32
8.3	Content. . . . .	32
8.3.1	Viewing Distribution Point Information . . . . .	33
8.3.2	Exporting the Recent Access History . . . . .	33
8.3.3	Clearing the Recent Access History . . . . .	34
8.4	Imaging . . . . .	34
<b>9</b>	<b>ZENworks Terminology</b>	<b>37</b>
<b>10</b>	<b>Context-Sensitive Topics</b>	<b>39</b>
10.1	Status . . . . .	39
10.1.1	ZENworks Adaptive Agent Properties . . . . .	39
10.1.2	ZENworks Server Properties . . . . .	40
10.1.3	Registration Keys . . . . .	40
10.1.4	Agent Status . . . . .	40
10.1.5	Additional Information . . . . .	40
10.2	Policies . . . . .	40
10.2.1	User-Assigned Policies . . . . .	41
10.2.2	Device-Assigned Policies . . . . .	41
10.2.3	Additional Information . . . . .	41
10.3	Bundles . . . . .	41
10.3.1	User-Assigned Bundles . . . . .	41
10.3.2	Device-Assigned Bundles . . . . .	41
10.3.3	Additional Information . . . . .	42
10.4	Inventory . . . . .	42
10.4.1	Scan Schedule. . . . .	42
10.4.2	Scan Now . . . . .	42
10.4.3	Next Scan . . . . .	42
10.4.4	Last Scan . . . . .	42
10.4.5	Last Upload . . . . .	42
10.4.6	Inventory Summary . . . . .	43
10.4.7	View Inventory Details . . . . .	43
10.4.8	Additional Information . . . . .	43
10.5	Logging . . . . .	43
10.5.1	Message Log . . . . .	43
10.5.2	Log Collection Server . . . . .	44
10.5.3	Additional Information . . . . .	44
10.6	Remote Management - Security . . . . .	44
10.6.1	Set Password. . . . .	44
10.6.2	Clear Password . . . . .	44
10.6.3	Enable Accepting Connections If Currently Blocked Due to Intruder Detection . . . . .	45
10.6.4	Display Audit Information. . . . .	45
10.6.5	Display Fingerprint. . . . .	45
10.6.6	Additional Information . . . . .	45
10.7	Remote Management - General. . . . .	45
10.7.1	Status. . . . .	46
10.7.2	Version. . . . .	46
10.7.3	Optimization. . . . .	46
10.7.4	Request Remote Management Session . . . . .	46
10.7.5	List Connected Remote Operators . . . . .	46
10.7.6	Additional Information . . . . .	46
10.8	Remote Management - Policy . . . . .	46

10.9	Bundle Properties	46
10.9.1	General	47
10.9.2	Status	47
10.9.3	Help Contacts	48
10.9.4	System Requirements	48
10.9.5	Time Schedule	48
10.9.6	Additional Information	48
10.10	Satellite - General	48
10.10.1	Current Status	49
10.10.2	Port	49
10.10.3	Content Replication Schedule	49
10.10.4	Satellite Role Status	49
10.11	Satellite - Collection Role Properties	49
10.11.1	Current Status	49
10.11.2	Parent URLs	49
10.11.3	Collection Schedule	49
10.12	Satellite - Content Role Properties	50
10.12.1	Current Status	50
10.12.2	Port	50
10.12.3	Repository File Count	50
10.12.4	Repository Size	50
10.12.5	Unique Device Accesses	50
10.12.6	Number of Files Served	50
10.12.7	Size of Data Served	50
10.12.8	Number of Errors	50
10.12.9	Actions	51
10.12.10	Recent Access History	51
10.12.11	Content Repository Details	51
10.12.12	Additional Information	51
10.13	Satellite - Imaging	51
10.13.1	Current Status	51
10.13.2	PXE Service Status	51
10.13.3	View Image Files	51
10.13.4	Imaging Statistics	52





# About This Guide

This guide provides information about the Novell® ZENworks® Adaptive Agent, a component of Novell ZENworks 10 Configuration Management. For additional information about ZENworks and other Novell products, visit [www.novell.com](http://www.novell.com) (<http://www.novell.com/products/zenworks>).

The information in this guide is organized as follows:

- ♦ Chapter 1, “Overview,” on page 11
- ♦ Chapter 2, “Status,” on page 13
- ♦ Chapter 3, “Policies,” on page 15
- ♦ Chapter 4, “Bundles,” on page 17
- ♦ Chapter 5, “Inventory,” on page 23
- ♦ Chapter 6, “Remote Management,” on page 25
- ♦ Chapter 7, “Logging,” on page 29
- ♦ Chapter 8, “Satellite Roles,” on page 31
- ♦ Chapter 9, “ZENworks Terminology,” on page 37
- ♦ Chapter 10, “Context-Sensitive Topics,” on page 39

## Audience

This guide is intended for ZENworks 10 Configuration Management end users (those with the ZENworks Adaptive Agent on their devices).

## Feedback

We want to hear your comments and suggestions about this manual and the other documentation included with this product. Please use the User Comments feature at the bottom of each page of the online documentation, or go to [www.novell.com/documentation/feedback.html](http://www.novell.com/documentation/feedback.html) and enter your comments there.

## Additional Documentation

ZENworks 10 Configuration Management is supported by other documentation (in both PDF and HTML formats) that you can use to learn about and implement the product. For additional documentation, see the [ZENworks 10 Configuration Management with SP1 \(v10.1\) documentation](http://www.novell.com/documentation/zcm10/index.html) (<http://www.novell.com/documentation/zcm10/index.html>).

## Documentation Conventions

In Novell documentation, a greater-than symbol (>) is used to separate actions within a step and items in a cross-reference path.

A trademark symbol (®, ™, etc.) denotes a Novell trademark. An asterisk (\*) denotes a third-party trademark.

When a single pathname can be written with a backslash for some platforms or a forward slash for other platforms, the pathname is presented with a backslash. Users of platforms that require a forward slash, such as Linux or UNIX, should use forward slashes as required by your software.

# Overview

# 1

The ZENworks® Adaptive Agent is part of the Novell® ZENworks 10 Configuration Management software that lets your administrator manage **devices** over the network. The ZENworks Adaptive Agent, commonly referred to as the Adaptive Agent, provides services that help your administrator do the following without visiting your device:

- ♦ Deliver software, patches, and other files to your device
- ♦ Manage policies that determine the behavior of your device.
- ♦ Take inventory of your device's hardware and software.
- ♦ Access your device from a remote location to troubleshoot and fix problems with hardware and software.

Each of these services is provided through the use of modules that plug in to the Adaptive Agent. The default modules included with the Adaptive Agent are the Bundles module, Policies module, Inventory module, Remote Management module, and Distribution Point module. Depending on the services implemented by your administrator, one or more of these modules might not be active on your device. For example, if your administrator does not intend to remotely access your workstation, the Remote Management module might not be installed.



# Status

# 2

The ZENworks® Adaptive Agent provides status information such as the last time it contacted a ZENworks Server and whether or not the Agent Modules are running.

## 2.1 Viewing the Agent's Status


- 1 Double-click the  icon in the notification area.
- 2 In the left navigation pane, click *Status*.

Status Field	Description
<i>Device Address</i>	The IP address of your <b>device</b> .
<i>Device Name</i>	The computer name for your device.
<i>Device State</i>	The device's state: managed, unmanaged, retired, or unknown. Unknown displays only if there is an error.
<i>Last Contact with Server</i>	The last time the Adaptive Agent had contact with the ZENworks Server listed in the <i>Server DNS</i> field.
<i>Next Contact with Server</i>	The next time the Adaptive Agent is scheduled to contact (or be contacted by) the ZENworks Server.
<i>Primary User</i>	The most frequent user of the device. Frequency is determined by number of logins, amount of time logged in, or designated user; your administrator determines the method used to calculate the primary user.
<i>ZENworks Adaptive Agent Version</i>	The version of the ZENworks Adaptive Agent.
<i>Management Zone</i>	The name of the ZENworks® Management Zone in which your device is located.
<i>Server DNS</i>	The DNS name of the ZENworks Server that your device's Adaptive Agent communicates with to send and receive ZENworks content and information.
<i>Server Address</i>	The IP address of the ZENworks Server listed in the <i>Server DNS</i> field.
<i>Registration Keys</i>	The alphanumeric strings supplied during registration of the device in the Management Zone. Registration keys, which are defined by your administrator, help determine bundle and policy assignments.
<i>Agent Status</i>	The status of the Agent modules.

## 2.2 Registering with a Key

Your **device** must be registered in the Management Zone in order to be managed through ZENworks® Configuration Management. To facilitate this process, your administrator can create registration keys. A registration key is alphanumeric string that you optionally supply to the ZENworks Adaptive Agent during registration of the device in order to automatically be assigned bundles and policies associated with the key.

Your administrator might provide you with a key and ask you to register (or reregister) your device. To do so:

- 1** Double-click the  icon in the notification area.
- 2** In the left navigation pane, click *Status*.
- 3** In the *Registration Keys* field, type the registration key, then click *Register*.

The Adaptive Agent registers the device using the key you supplied.


Registration keys are cumulative, which means that when you register with more than one key, the device receives the bundles and policies associated with each of the keys. Each key used for registration is added to the list for future reference.

The ZENworks® Adaptive Agent applies policies that your administrator defines. Policies are rules that control a range of hardware and software configuration settings. For example, your administrator can create policies that control the Adaptive Agent features you can use, the bookmarks available in your browser, the printers you can access, and the security and system configuration settings for your **device**.

You cannot change the policies applied by your administrator. However, it is helpful to understand the difference between user-assigned policies and device-assigned policies and how to see which policies are being applied.

## 3.1 User-Assigned Versus Device-Assigned Policies

Policies might be assigned to you or they might be assigned to your **device**. Policies assigned to you are referred to as user-assigned policies, and policies assigned to your device are referred to as device-assigned policies.

The ZENworks® Adaptive Agent enforces your user-assigned policies only when you are logged in to your user directory (Microsoft® Active Directory® or Novell® eDirectory™). If you are not logged in, you can log in through the ZENworks Configuration Management login screen. To do so, right-click the  icon in the notification area, then click *Login*.

The Adaptive Agent always enforces the device-assigned policies regardless of whether or not you are logged in. Therefore, device-assigned policies are enforced for all users of the device.

## 3.2 Viewing Policies

To view the policies assigned to you and your device:

- 1 Double-click the  icon in the notification area.
- 2 In the left navigation pane, click *Policies*.





# Bundles

# 4

Software applications and other files are distributed to your **device** as bundles. A bundle contains all of the content (files, etc.) and instructions (registry modifications, shortcut information, etc.) required to install the software on the device.


## 4.1 Bundles Versus Applications

Bundles are different than standard applications, such as Windows\* Notepad, that already reside on your **device**. When you double-click a bundle to launch it, the ZENworks® Adaptive Agent might first complete a variety of distribution tasks before the application is launched, including installing the application files, running scripts, and changing the device's registry, specific INI files, or environment variables. These tasks are all configured by your administrator to ensure that the application runs correctly on your device.

In some instances, a bundle's icon appears dimmed or grayed out. This indicates that your device does not meet the requirements that the administrator defined for the application, or the bundle is not scheduled to be available to you at that time. The Adaptive Agent does not distribute the application to your device until the requirements are met or the schedule is appropriate.

## 4.2 User-Assigned Versus Device-Assigned Bundles

The bundles that you see on your **device** might be assigned to you or they might be assigned to the device. Bundles assigned to you are referred to as user-assigned bundles, and bundles assigned to your device are referred to as device-assigned bundles.

The ZENworks® Adaptive Agent displays your user-assigned bundles only when you are logged in to your user directory (Microsoft\* Active Directory\* or Novell® eDirectory™). If you are not logged in, you can log in through the ZENworks Configuration Management login screen. To do so, right-click the  icon in the notification area, then click Login.


The Adaptive Agent always displays the device-assigned bundles regardless of whether or not you are logged in. Device-assigned bundles can be launched by anyone who uses your device.

## 4.3 Accessing Bundles

The ZENworks® Adaptive Agent provides three ways for you to access the bundles that are assigned to you: the ZENworks Window, ZENworks Explorer, and the ZENworks Icon.

### 4.3.1 ZENworks Window

The ZENworks Window is a standalone window that you can launch from the Start menu (*Start menu > Programs > Novell ZENworks > ZENworks Window*).

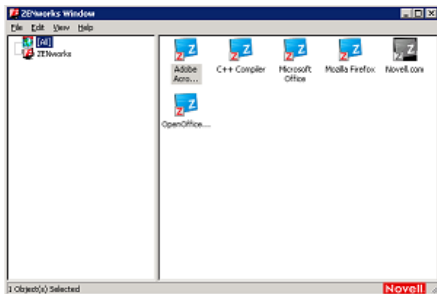

The ZENworks Window left pane displays the following:


- ♦ **[All] folder:** Contains all bundles that have been distributed to you, regardless of the folder in which they are located.
- ♦ **ZENworks folder:** Contains all bundles that have not been assigned to a different folder. The ZENworks folder is the default folder for bundles; however, your administrator can create additional folders in which to organize bundles, and can even rename the ZENworks folder.
- ♦ **Personal folder:** Provides a location for you to create personal folders for organizing applications. This is an administrator-controlled feature. By default, it is disabled, which means the folder does not appear.

When you select a folder in the left pane, the right pane displays the bundles that are contained within the folder. You can:

- ♦ Install a bundle or launch an application for an already installed bundle.
- ♦ View the properties of a bundle. The properties include a description of the bundle, information about people to contact for help with the bundle, the times when the bundle is available for use, and the system requirements established for the bundle.
- ♦ Repair an installed application.
- ♦ Uninstall an application. This is an administrator-controlled feature that might not be enabled.

### 4.3.2 ZENworks Explorer

ZENworks Explorer is an extension to Windows\* Explorer that enables bundles to be displayed in Windows Explorer, on the desktop, on the Start menu, on the Quick Launch toolbar, and in the notification area. The following graphic shows bundles displayed in Windows Explorer.

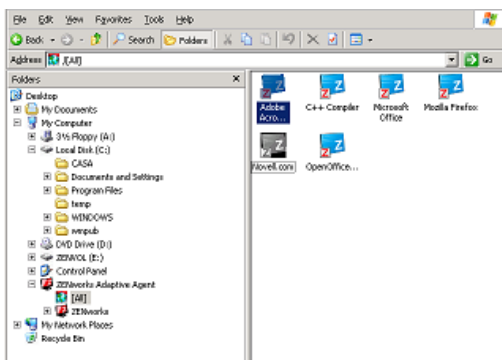


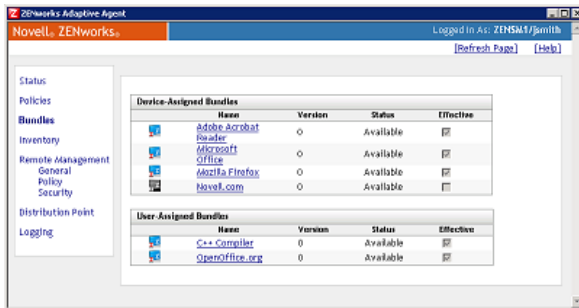
The following graphic shows bundles displayed on the desktop.



You can perform the same tasks on the bundles in the ZENworks Explorer as you can in the ZENworks Window.

### 4.3.3 ZENworks Icon

The ZENworks Icon  is located in the Windows notification area. You can double-click the icon to display the ZENworks Adaptive Agent properties. Located in the left navigation pane, the Bundles link lets you view the bundles that are assigned to you and to your **device**.




The bundle list includes the following information:

- ♦ **Name:** Displays the name of the bundle. Click the name to display the properties for the bundle, including such information as the version, folder and icon locations, and help contacts., and the time schedules. Based on the configuration of the schedules for the bundle in ZENworks Control Center, the time schedules are as follows:



TimeSchedule	Details
No Schedule / Default	No schedule is configured for the bundle
On a Specific Event	Runs the scheduled action when the specified event is triggered such as user login, user logout, or device boot
Relative	Runs the scheduled action relative to a specified number of days, hours, and minutes from when the device is refreshed
Daily	Runs the scheduled action daily at the specified time
Weekly	Runs the scheduled action on the selected day of the week
Monthly	Runs the scheduled action on the selected day of the month
Yearly	Runs the scheduled action on the selected day of the year
Specific Date and Time	Runs the scheduled action once on the date and time specified








TimeSchedule	Details
Specific Time Interval	Repeatedly runs the scheduled action every xxx months, weeks, days, hours, and/or minutes from the start time
On Refresh	Runs the scheduled action on device refresh
Always	The scheduled action is always active.
Date Specific	Runs the scheduled action on the specified date
Day Range	Runs the scheduled action during the specified time interval

- ♦ **Status:** Displays the installation status for the bundle.
- ♦ **Effective:** Displays whether or not the bundle can be used on the device. If the *Effective* box is selected, the bundle meets all system requirements and schedule constraints to be used. You can click the bundle icon  to launch the bundle.

If the box is not selected, it cannot be used; to find out why, click the bundle name to display the system requirements and schedule properties.

## 4.4 Understanding Bundle Icons

A bundle icon changes to reflect the current status of the bundle. The following table shows the bundle icons using the default light blue background icon. Your administrator might choose to use a different background icon; however, the status icons such as  and , remain the same.

Icon	Status
	Available. You can launch the bundle.
	Unavailable. You cannot launch the bundle. Either the <b>device</b> does not meet the system requirements established for the bundle or the bundle is not scheduled to be available at the current time.
	Downloading. The bundle is downloading from the network location where it is stored.
	Installing. The bundle is installing to the device.
	Running. The bundle is currently running.
	Uninstalling. The bundle is being removed from the device.
	Not Installed. The bundle failed to install. Right-click the icon, then click <i>Verify</i> to repair the bundle.


## 4.5 Launching a Bundle


By default, the ZENworks® Adaptive Agent does not distribute (download and install) a bundle to your **device** until the first time you launch it. The distribution process might include installing the bundle's files, running scripts, and changing the device's registry, specific INI files, or environment variables. Or, the process might include nothing more than providing a shortcut to the application's executable file on your local device or a network server.

To launch a bundle:

- 1 Access the bundle in one of the following locations:

**ZENworks Window:** From the *Start* menu, click *Programs > Novell ZENworks > ZENworks Window*.

**ZENworks Explorer:** Open Windows\* Explorer and find the  ZENworks Adaptive Agent entry. Depending on how your ZENworks administrator configured the bundle, the bundle icon might also be displayed on the desktop, Start menu, Quick Launch toolbar, or notification area.

**ZENworks Icon:** In the notification area, double-click the  icon, then click *Bundles*.

- 2 Double-click the bundle icon.


## 4.6 Postponing a Bundle Download

If, after you launch a bundle, it begins to download and you need to stop the download, you can postpone the download to a later time. When you resume the download, it continues from the point where it previously stopped.

To postpone a bundle download:

- 1 Access the bundle in one of the following locations:

**ZENworks Window:** From the *Start* menu, click *Programs > Novell ZENworks > ZENworks Window*.

**ZENworks Explorer:** Open Windows Explorer and find the  ZENworks® Adaptive Agent entry. Depending on how your ZENworks administrator configured the bundle, the bundle icon might also be displayed on the desktop, Start menu, Quick Launch toolbar, or notification area.

- 2 Right-click the bundle icon, then click *Postpone*.


## 4.7 Verifying a Bundle

If an installed application is not functioning correctly or you think it might be outdated, you can verify that the application's bundle information is still correct. If it is not, the ZENworks Adaptive Agent reinstalls the bundle to your workstation.

To verify a bundle:

- 1 Access the bundle in one of the following locations:

**ZENworks Window:** From the *Start* menu, click *Programs > Novell ZENworks > ZENworks Window*.

**ZENworks Explorer:** Open Windows\* Explorer and find the  ZENworks® Adaptive Agent entry. Depending on how your ZENworks administrator configured the bundle, the bundle icon might also be displayed on the desktop, Start menu, Quick Launch toolbar, or notification area.

- 2 Right-click the bundle icon, then click *Verify*.


## 4.8 Viewing a Bundle's Properties

You can view a bundle's properties to see its version number, current installation status, and help contacts. In addition, if the bundle is unavailable, you can see if it is unavailable because of system requirements or schedule restrictions.

To view a bundle's properties:

- 1 Access the bundle in one of the following locations:

**ZENworks Window:** From the *Start* menu, click *Programs > Novell ZENworks > ZENworks Window*.

**ZENworks Explorer:** Open Windows\* Explorer and find the  ZENworks® Adaptive Agent entry. Depending on how your ZENworks administrator configured the bundle, the bundle icon might also be displayed on the desktop, Start menu, Quick Launch toolbar, or notification area.

- 2 Right-click the bundle icon, then click *Properties*.

## 4.9 Uninstalling a Bundle

Uninstall is an administrator-controlled feature. By default, uninstall is not enabled, which means that you can only uninstall bundles if your administrator has enabled the feature. Uninstall is enabled on a per-bundle basis. Depending on what your administrator enables, you might be able to uninstall some bundles but not others.


When you uninstall a bundle, the ZENworks® Adaptive Agent removes all files from your **device** and undoes all configuration settings made to your device during the bundle installation. Only files that the Adaptive Agent installs specifically for the bundle are removed. For example, the Adaptive Agent does not remove any shared files (files used by another application) or any user-created files such as word processing documents or spreadsheets.

After you uninstall a bundle, the bundle's icon remains on your device. This enables you to install the bundle again whenever necessary.

To uninstall a bundle:

- 1 Access the bundle in one of the following locations:

**ZENworks Window:** From the *Start* menu, click *Programs > Novell ZENworks > ZENworks Window*.

**ZENworks Explorer:** Open Windows\* Explorer and find the  ZENworks® Adaptive Agent entry. Depending on how your ZENworks administrator configured the bundle, the bundle icon might also be displayed on the desktop, Start menu, Quick Launch toolbar, or notification area.

- 2 Right-click the bundle icon, then click *Uninstall*.

The ZENworks® Adaptive Agent scans your **device** for software and hardware information. This information is viewable by both you and your administrator.

## 5.1 What Is Inventory Information Used For?

The software and hardware inventory taken from your **device** might be used in a variety of ways. Your hardware information, for example, might be used by your administrator to see whether or not your device meets the system requirements for a bundle you need. Or, your software information might be used to validate compliance with company software standards.


You can use the inventory information to quickly find out details about your device, such as its asset tag number, IP address, total memory, and free disk space. You can view hardware details, such as the manufacturer and model of your hard drives, disk drives, and video card. You can also view software details, such as installed Windows\* hot fixes and patches and the version numbers and locations of installed software products.

## 5.2 Scanning the Device

Unless your administrator has disabled the inventory scan schedule, the ZENworks® Adaptive Agent performs an inventory scan on your **device** on a regular basis. Your administrator determines the schedule; the default schedule is the first day of every month.

You can also initiate an inventory scan on your device, unless your administrator has disabled your ability to do so.

To initiate a scan:

- 1 Double-click the  icon in the notification area.
- 2 In the left navigation pane, click *Inventory*.
- 3 Click *Scan Now*.

There is no indication that the scan is being performed. However, when you refresh the Inventory page, you know the scan occurred if the *Last Scan* field displays the current date and time. You can click *View Inventory Details* to see the results of the scan.

## 5.3 Viewing Inventory Information

You can use the inventory information to quickly find out details about your **device**, such as its asset tag number, IP address, total memory, and free disk space. You can view hardware details, such as the manufacturer and model of your hard drives, disk drives, and video card. You can also view software details, such as installed Windows\* hot fixes and patches and the version numbers and locations of installed software products.


To view inventory information:

- 1 Double-click the  icon in the notification area.

- 2 In the left navigation pane, click *Inventory*.
- 3 Click *View Inventory Details*.

## 5.4 Completing a Collection Data Form

In addition to being able to schedule regular scans of your **device**, your administrator can create a collection data form to gather additional information from you. The information requested in the data form is determined by your administrator.

The collection data form appears as a dialog box on your desktop and remains until you submit the form. In addition, your administrator can configure the ZENworks<sup>®</sup> Adaptive Agent to display the form as an option when you right-click the  icon in the notification area. In this case, the option remains even after you submit it; this allows you to resubmit the form when any of the requested information changes.



# Remote Management

# 6

The ZENworks® Adaptive Agent supports management of your **device** from a remote location. This enables your administrator or Help Desk personnel to remotely access or control your device in order to resolve problems with the device.

## 6.1 Remote Management Operations

The ZENworks® Adaptive Agent supports the following Remote Management operations:


- ♦ **Remote Control:** Enables a remote operator (such as your administrator or a help desk operator) to control your **device**.
- ♦ **Remote View:** Enables a remote operator to view your device. This is a view-only mode; the operator cannot perform any actions on your device.
- ♦ **Remote Diagnostics:** Enables a remote operator to run specific administrative tools (such as Registry Editor, Computer Management, and Services) for diagnostic purposes.
- ♦ **File Transfer:** Enables a remote operator to transfer files to and from your device.
- ♦ **Remote Execute:** Enables a remote operator to run executables on your device.

The operations that are allowed on your device depend on which ones your administrator has enabled. For information about viewing which operations are available, see [Viewing the Remote Management Policy](#).

## 6.2 Requesting a Remote Management Session

In some situations, you might want to request a Remote Management session with a remote operator, or you might be requested by a remote operator to initiate a session.

To request a session:

- 1 Double-click the  icon in the notification area.
- 2 In the left navigation pane, locate the *Remote Management* heading, then click *General*.
- 3 Click *Request Remote Management Session* to display the Request Session dialog box.


The ability to request a Remote Management session is controlled by your administrator, which means the option might be disabled, particularly if your company or department does not have dedicated help desk personnel to serve as on-call remote operators. If the *Request Remote Management Session* option is not displayed as linked text, the option is disabled.
- 4 In the *Listening Remote Operators* list, select the remote operator you want to open the remote session with.

or

If the remote operator is not listed, enter the operator's connection information in the *Request Connection* fields.

- 5 In the *Operation* field, select the type of operation (Remote Control, Remote View, Remote Diagnostics, File Transfer, or Remote Execute) you want to open. For information about each operation, see [Remote Management Operations](#).
- 6 Click *Request* to launch the session.

## 6.3 Viewing Currently Connected Remote Operators


- 1 Double-click the  icon in the notification area.
- 2 In the left navigation pane, locate the *Remote Management* heading, then click *General*.
- 3 Click *List Connected Remote Operators* to display the Request Operators dialog box.

The ability to view connected remote operators is controlled by your administrator. If the *List Connected Remote Operators* option is not displayed as linked text, the option is disabled.

## 6.4 Viewing the Remote Management Policy

The Remote Management operations that are enabled on your device, and the settings that apply to those operations, are controlled by your administrator through the use of a Remote Management policy.


You can view the policy settings. However, you cannot change any of the settings. To view the settings:

- 1 Double-click the  icon in the notification area.
- 2 In the left navigation pane, locate the *Remote Management* heading, then click *Policy*.
- 3 In the *Category* list, select the policy category you want to view: General, Remote Control, Remote View, Remote Execute, File Transfer, Remote Diagnostics, or Security.

## 6.5 Using the Security Settings

The Remote Management security settings let you control the password required to perform remote operations on your device, re-enable operations after they have been suspended because of a detected intruder, display information about the Remote Management operations performed on your device, and display information about the self-signed certificate used for remote operations.

The security settings are controlled by your administrator and might not be available for you to use.

- 1 Double-click the  icon in the notification area.
- 2 In the left navigation pane, locate the *Remote Management* heading, then click *Security*.
- 3 Click the security setting you want to use:

**Set Password:** You can set the password only if the *Allow user to set password on the managed device* option is enabled for the managed device. There are two types of password:

- **ZENworks® password:** This password is used in ZENworks password-based authentication. It can be up to 255 characters long.
- **VNC password:** This password is used in VNC password-based authentication. It can be up to 8 characters long.

The ZENworks password authentication is recommended because it is more secure than the VNC password-based authentication. Use the VNC password-based authentication for interoperability with open source VNC viewers.

**Clear Password:** Clears the selected password.

**Enable Accepting Connections if Currently Blocked Due to Intruder Detection:** If a remote operator's attempt to log in fails a certain number of times (the default is 5), remote connections are disabled. Connections are automatically allowed again after a specific amount of time (the default is 10 minutes); however, you can click this option to manually enable connections.

**Display Audit Information:** Displays the following information for the remote operations that have been performed on your device.

Field	Description
<i>ZENworks User</i>	Name of the ZENworks user logged in when the remote operation took place.
<i>Remote Operator</i>	Name of the remote operator who performed the operation.
<i>Console Machine</i>	Name of the device from which the remote operation was performed.
<i>Console IP</i>	IP address of the device from which the remote operation was performed.
<i>Operation</i>	The type of operation performed: Remote Control, Remote Execute, Remote View, Remote Diagnostics, File Transfer, or Security.
<i>Start Time</i>	The time when the remote operation began.
<i>End Time</i>	The time when the remote operation finished.
<i>Status</i>	The status of the remote operation: Success, Running, or Failure.

**Display Fingerprint:** Displays the fingerprint for the device's self-signed certificate. A remote operator might ask you for the fingerprint in order to validate the device's credentials before performing a remote operation on the device.




While performing tasks on your **device**, the ZENworks® Adaptive Agent generates messages to track its activity. Each message is assigned a severity level: information, warning, error, or debug.

## 7.1 Changing the Logging Severity Level

By default, your administrator controls which severity levels are recorded to the local log file. The *Managed Severity for Device* is field displays the effective severity level that is recorded. This level can be set for the entire ZENworks Zone or for an individual device. If your administrator needs to troubleshoot a ZENworks® Adaptive Agent issue on your **device**, he or she might direct you to change the severity setting so that additional information is logged. Otherwise, you probably never need to change the severity setting.

To change the severity level:

- 1 Double-click the  icon in the system tray.
- 2 In the left navigation pane, click *Logging*.
- 3 In the *Log Messages if Severity Is* field, select one of the following options:
  - ♦ **Managed: level:** Sets the logging severity level at the level defined in the ZENworks Zone by the administrator, where *level* represents the level (Info, Warning, Error, and Debug).
  - ♦ **Error:** Logs error messages only. Error messages are generated whenever the Adaptive Agent is unable to perform a requested task.
  - ♦ **Warning and Above:** Logs warning and error messages. Warning messages are generated whenever the Adaptive Agent encounters a problem that might result in failure of a task.
  - ♦ **Information and Above:** Logs informational, warning, and error messages. Informational messages are generated whenever the Adaptive Agent performs a normal task.
  - ♦ **Debug:** Logs all available messages to enable debug tracing of a problem. This level significantly increases the log file size and should be used only under the direction of your administrator.
- 4 Click *Set* to apply the new severity level.

## 7.2 Viewing the Local Log File

The local log file, `zmd-messages.log`, is stored in the `program files\novell\zenworks\logs\localstore` directory on the root of the system drive (for example, `c:\program files\novell\zenworks\logs\local-store\zmd-messages.log`). You can view the file with a text editor.

Each entry in the file contains multiple fields. Each field begins with [ and ends with ]. For example, [ERROR]. The following table describes the fields.

Field Number	Example	Description
1	ERROR	The severity level. Possible values are ERROR, WARNING, INFORMATION, and DEBUG.
2	3/14/2007 4:21:35 PM	The date and time the message was generated.
3	JSmith	The user.
4	PolicyManager	The Adaptive Agent module that generated the message.
5	launcher configuration policy	The ID assigned to the message.
6	PolicyModule: Registering for events.	The message.
7		Additional information. Usually empty.
8	workstation1	Any objects related to the message.

# Satellite Roles

# 8

A managed device with satellite roles can perform certain roles that a ZENworks® Primary Server normally performs. Any managed device (server or workstation) can perform satellite roles. When the administrator configures the device, the administrator specifies the roles it performs. Satellite roles help to minimize WAN traffic in the ZENworks system.

Satellite roles include the following:

- ♦ **Collection:** To improve information roll-up access for a group of devices and to minimize traffic to the ZENworks Primary Server that is hosting the ZENworks database, the ZENworks administrator can enable the Collection role on a device and designate whether your device as a Collection Point.
- ♦ **Content:** ZENworks Configuration Management supports distributing bundles and policies from ZENworks Servers or from other devices that are designated as Distribution Points. Your administrator controls whether or not your device is a Distribution Point.
- ♦ **Imaging:** The Imaging role installs the Imaging services and adds the Imaging role to the device. With this role, the device can be used as an Imaging server to perform all Imaging operations, such as taking an image and applying the image within or across subnets by using unicast or multicast imaging. Your administrator controls whether or not your device has the imaging role.

The following sections contain more information:


- ♦ [Section 8.1, “General Satellite Role Information,” on page 31](#)
- ♦ [Section 8.2, “Collection,” on page 32](#)
- ♦ [Section 8.3, “Content,” on page 32](#)
- ♦ [Section 8.4, “Imaging,” on page 34](#)

## 8.1 General Satellite Role Information

You can view a device’s general properties, including its current status, port, content replication schedule, and role status.

If your ZENworks administrator has specified that this device performs a satellite role, the information on this page lets you view the device’s general information; however, you cannot edit the fields on this page.

To view general satellite role information:

- 1 Double-click the  icon in the notification area.
- 2 In the left navigation pane, under *Satellite*, click *General*.

Field	Description
<i>Current Status</i>	Displays whether your device is currently configured to perform a satellite role.
<i>Port</i>	Displays the port that the device is using.


Field	Description
<i>Content Replication Schedule</i>	Displays how often the device's content is updated from the parent Primary Server. By default, a Content role device checks for new or removed content every 5 minutes. Your ZENworks administrator can change this schedule. For example, your administrator might want to increase the time between cycles if the ZENworks system is not adding content to your system very often or if the connection between the Content role device and its parent Primary Server is slow.
<i>Satellite Role Status</i>	Displays the roles that the device is performing (Collection, Content, and Imaging) and its current status (Active or Inactive).

## 8.2 Collection

You can view a device's collection role properties, including its current status, parent URLs, and collection schedule; however, you cannot edit the fields on this page.

ZENworks® Configuration Management lets your ZENworks administrator enable the Collection role on a device. This improves information roll-up access for a group of devices and minimizes traffic to the ZENworks Primary Server that is hosting the ZENworks database. The information that is rolled up includes device inventory information, messages (errors, warning, informational, and so forth), and policy and bundle statuses. Your administrator controls whether or not your device is a Collection Point.

To view collection role information:

- 1 Double-click the  icon in the notification area.
- 2 In the left navigation pane, under *Satellite*, click *Collection*.

Field	Description
<i>Current Status</i>	Displays whether your device is currently configured to function as a Collection Point.
<i>Port</i>	Displays the URL for this device's parent ZENworks servers.
<i>Parent URLs</i>	Displays the URL for this device's parent ZENworks servers.
<i>Collection Schedule</i>	Displays how often the collected data is rolled up from the devices that use it as a collection device. Your ZENworks administrator can change this collection schedule.


## 8.3 Content

ZENworks® Configuration Management supports distributing bundles and policies from ZENworks Servers or from other **devices** that are designated as Distribution Points. Your administrator controls whether or not your device is a Distribution Point.



### 8.3.1 Viewing Distribution Point Information

If your **device** is serving as a Distribution Point, you can view statistical information about the number of times it has been accessed and the content (bundles and policies) that is stored on it.


- 1 Double-click the  icon in the notification area.
- 2 In the left navigation pane, under *Satellite*, click *Distribution Point*.

Field	Description
<i>Current Status</i>	The status of the Distribution Point module. If the <i>Stopped</i> status is displayed, your device is currently not serving as a Distribution Point.
<i>Port</i>	The port being used by the device to perform its Distribution Point function.
<i>Repository File Count</i>	The number of bundle and policy files being stored in the repository on your device.
<i>Repository Size</i>	The amount of disk space being used by the repository.
<i>Unique Device Accesses</i>	The number of different devices that have accessed content from the repository on your device. This number represents the total unique accesses since the last time the <i>Clear History</i> option was used to reset the number to 0.
<i>Number of Files Served</i>	The number of bundle and policy files delivered to other devices. This number represents the total number of files transferred since the last time the <i>Clear History</i> option was used to reset the number to 0.
<i>Size of Data Served</i>	The total amount of data delivered to other devices. This amount represents the total number of files transferred since the last time the <i>Clear History</i> option was used to reset the amount to 0.
<i>Number of Errors</i>	The total number of errors encountered while transferring files. Click the <i>Export History</i> option to export transactions to a comma-separated values (CSV) file that you can use to examine the errors.
<i>Actions</i>	Click <i>Export History</i> to export the information from the <i>Recent Access History</i> list to a CSV file. Click <i>Clear History</i> to clear the information from the list and to reset the <i>Unique Device Accesses</i> , <i>Number of Files Transferred</i> , <i>Amount of Data Transferred</i> , and <i>Number of Errors</i> fields to 0.
<i>Recent Access History</i>	A listing of the last 10 devices to access the repository. The list shows only the 10 most recent accesses. However, all entries are saved until the history is cleared. To analyze all of the entries, click <i>Export History</i> to create a CSV file.
<i>Content Repository Details</i>	A listing of the bundles and policies stored in the repository.

### 8.3.2 Exporting the Recent Access History

The Recent Access History displays information about the 10 most recent repository accesses. This includes information about the **device** that performed the access, the total number of downloads that occurred, the amount of data that was transferred, and whether or not any errors occurred.

The list shows only the 10 most recent accesses. However, all entries are saved until the history is cleared. To analyze all of the entries, you can export the history to a comma-separated values (CSV) file.

- 1 Double-click the  icon in the notification area.
- 2 In the left navigation pane, under *Satellite*, click *Content*.
- 3 Click *Export History*, specify a location and name for the CSV file, then click *Save*.
- 4 To view the history file, open it in a text editor.

The history file contains two sections: Distribution Point Access History and Distribution Point Error History.

**Distribution Point Access History:** Contains an entry for each transaction in the *Recent Access History* list. Each entry is formatted as follows:

```
IP Address,DNS Name,Number of Files Transferred,Bytes Transferred,Number of Errors,Last Access (UTC)
```

For example:

```
123.45.167.52,wks1.novell.com,3,544,0,3/20/2007 7:16:59 PM
```

**Distribution Point Error History:** Contains an entry for each transaction that included an error. Each entry is formatted as follows:


```
IP Address,DNS Name,Requested URI,Status Code,Access Time (UTC)
```

For example:

```
123.45.167.53,wks2.novell.com,/app.msi,404,3/22/2007 9:11:33 AM
```

### 8.3.3 Clearing the Recent Access History

You can clear the Recent Access History to remove all entries from the list and to reset the *Unique Device Accesses*, *Number of Files Transferred*, *Amount of Data Transferred*, and *Number of Errors* fields to 0.


- 1 Double-click the  icon in the notification area.
- 2 In the left navigation pane, under *Satellite*, click *Content*.
- 3 Click *Clear History*, then click *Yes* to confirm deletion of the history.

## 8.4 Imaging

You can view a device's imaging role properties, including its current status, PXE service status, image files and imaging statistics; however, you cannot edit the fields on this page.

ZENworks® Configuration Management lets your ZENworks administrator enable the Imaging role on a device. With this role, the device can be used as an Imaging server to perform all Imaging operations, such as taking an image and applying the image within or across subnets by using unicast or multicast imaging. Your administrator controls whether or not your device has the Imaging role.

To view collection role information:

- 1 Double-click the  icon in the notification area.
- 2 In the left navigation pane, under *Satellite*, click *Imaging*.

Field	Description
<i>Current Status</i>	Displays whether your device is currently configured to perform Imaging operations. The current status is <i>Active</i> when the device is promoted to Satellite Server with Imaging role.
<i>PXE Service Status</i>	Displays whether the Proxy DHCP service is enabled on the device.
<i>View Image Files</i>	Displays the image files stored in the <code>%ZENWORKS_HOME%\work\content-repo\images</code> directory.
<i>Imaging Statistics</i>	Displays the following information: <ul style="list-style-type: none"><li>♦ <b>PXE Requests:</b> The number of imaging requests of any kind that have been received by the Imaging Server since it was last started. This includes requests that failed, were denied, or were referred to other Imaging Servers. Information about each of these requests, such as the source, type, date/time, and results, is logged on the Imaging Server.</li><li>♦ <b>Images Sent:</b> The number of images that the Imaging Server has sent to imaging clients since the Imaging Server was last started. This includes only images that were retrieved from this Imaging Server.</li><li>♦ <b>Images Received:</b> The number of new images that have been received and stored on the Imaging Server since it was last started. This includes images that were received through client referrals.</li></ul>



# ZENworks Terminology

# 9

The following terms are used throughout the ZENworks® Adaptive Agent Help.

**bundle:** The content and instructions required to install software on your device.

**collection role:** A role that a managed device can perform to help support distributing bundles and policies from ZENworks Servers or from other devices that are designated as Distribution Points.

**content role:** A role that a managed device can perform to improve information roll-up access for a group of devices and to minimize traffic to the ZENworks Primary Server that is hosting the ZENworks database.

**device:** A server or workstation.

**device-assigned bundle or device-assigned policy:** Bundles and policies that are assigned to a device so they are available to all users of the device.

**Distribution Point:** A device designated for the purpose of delivering bundles and policies to other devices.

**imaging role:** A role that installs the Imaging services and adds the Imaging role to a managed device. With this role, the device can be used as an Imaging server to perform all Imaging operations, such as taking an image and applying the image within or across subnets by using unicast or multicast imaging.

**inventory:** Data about your device's hardware and software.

**Management Zone:** A grouping of devices that all belong to the same administrative domain.

**policy:** Rules that control a range of hardware and software configuration settings.

**primary user:** The most frequent user of the machine. Frequency is determined by number of logins, amount of time logged in, or designated user; your administrator determines the method used to calculate the primary user.

**registration key:** An alphanumeric string created by your administrator and used by the ZENworks Adaptive Agent to register your device in the Management Zone.


**Remote Management:** The ability to remotely access or control your device in order to resolve problems with the device. The following remote management operations are available: Remote Control, Remote View, Remote Diagnostics, File Transfer, and Remote Execute.

**satellite role:** A managed device with satellite roles can perform certain roles that a ZENworks Primary Server normally performs. Any managed device (server or workstation) can perform satellite roles. When the administrator configures the device, the administrator specifies the roles it performs. Satellite roles help to minimize WAN traffic in the ZENworks system. Satellite roles include the following: Collection, Content, and Imaging.

**remote operator:** The person who is remotely accessing or controlling your device.

**user-assigned bundle or user-assigned policy:** Bundles and policies that are assigned to a user. They are available only when the assigned user is logged in.

**ZENworks Explorer:** An extension to Windows\* Explorer that enables bundles to be displayed in Windows Explorer, on the desktop, on the Start menu, on the Quick Launch toolbar, and in the notification area.

**ZENworks Icon:** The  icon located in the Windows notification area. You can double-click the icon to display the ZENworks Adaptive Agent properties.

**ZENworks Window:** A standalone window that you can launch from the Start Menu (*Start Menu > Programs > Novell ZENworks > ZENworks Window*). The ZENworks Window displays all assigned bundles.

**ZENworks Server:** A server that your ZENworks Adaptive Agent contacts in order to send information to and retrieve information from your Management Zone.

This section contains context-sensitive help for the Novell® ZENworks® Adaptive Agent user interface:

- ♦ [Section 10.1, “Status,” on page 39](#)
- ♦ [Section 10.2, “Policies,” on page 40](#)
- ♦ [Section 10.3, “Bundles,” on page 41](#)
- ♦ [Section 10.4, “Inventory,” on page 42](#)
- ♦ [Section 10.5, “Logging,” on page 43](#)
- ♦ [Section 10.6, “Remote Management - Security,” on page 44](#)
- ♦ [Section 10.7, “Remote Management - General,” on page 45](#)
- ♦ [Section 10.8, “Remote Management - Policy,” on page 46](#)
- ♦ [Section 10.9, “Bundle Properties,” on page 46](#)
- ♦ [Section 10.10, “Satellite - General,” on page 48](#)
- ♦ [Section 10.11, “Satellite - Collection Role Properties,” on page 49](#)
- ♦ [Section 10.12, “Satellite - Content Role Properties,” on page 50](#)
- ♦ [Section 10.13, “Satellite - Imaging,” on page 51](#)

## 10.1 Status

The Status page provides information such as the last time the ZENworks® Adaptive Agent contacted a ZENworks Server and whether or not the Agent modules are running.

### 10.1.1 ZENworks Adaptive Agent Properties

The following fields provide information about the Adaptive Agent:

- ♦ **Device Address:** The IP address of your **device**.
- ♦ **Device Name:** The computer name for your device.  
**Device State:** The device’s state: managed, unmanaged, retired, or unknown. Unknown displays only if there is an error.
- ♦ **Last Contact with Server:** The last time the Adaptive Agent had contact with the ZENworks Server.
- ♦ **Next Contact with Server:** The next time the Adaptive Agent is scheduled to contact (or be contacted by) the ZENworks Server.
- ♦ **Primary User:** The most frequent user of the machine. Frequency is determined by number of logins, amount of time logged in, or designated user; your administrator determines the method used to calculate the primary user.

## 10.1.2 ZENworks Server Properties

The following fields provide information about the ZENworks Server:

- ♦ **Management Zone:** The name of the administrative domain in which the ZENworks Server and your device are registered.
- ♦ **Server DNS:** The DNS name of the ZENworks Server that your device's Adaptive Agent communicates with to send and receive ZENworks content and information.
- ♦ **Server Address:** The IP address of the ZENworks Server listed in the *Server DNS* field.

## 10.1.3 Registration Keys

Registration keys are alphanumeric strings supplied during registration of the device in the Management Zone. Registration keys, which are defined by your administrator, help determine bundle and policy assignments.

In general, you should not need to add registration keys. If your administrator requests you to do so, be aware of the following:

- ♦ Registration keys are cumulative; if the device has been registered with one key and is then registered with another key, the device receives all bundle and policy assignments associated with both keys' device groups.
- ♦ The key entered in the Registration Keys field is the one that is used when you click *Register*. Any keys included in the list below the field are for reference only; the device is already assigned the bundles and policies associated with these keys.

## 10.1.4 Agent Status

Displays the status of the Agent modules. Possible status entries include *Running* and *Disabled*.

## 10.1.5 Additional Information

Click [here](#) to view the full ZENworks® Adaptive Agent Help file.


## 10.2 Policies

Policies are rules that control a range of hardware and software configuration settings. For example, your administrator can create policies that control the Adaptive Agent features you can use, the bookmarks available in your browser, the printers you can access, and the security and system configuration settings for your [device](#).

The Policies page lets you view the policies that are assigned to you and your device. You cannot change the policies applied by your administrator. However, it is helpful to understand the difference between user-assigned policies and device-assigned policies and how to see which policies are being applied.



## 10.2.1 User-Assigned Policies

The ZENworks<sup>®</sup> Adaptive Agent enforces your user-assigned policies only when you are logged in to your user directory (Microsoft<sup>\*</sup> Active Directory<sup>\*</sup> or Novell<sup>®</sup> eDirectory<sup>™</sup>). If you are not logged in, you can log in through the ZENworks Configuration Management login page. To do so, right-click the  icon in the notification area, then click *Login*.

## 10.2.2 Device-Assigned Policies

The Adaptive Agent always enforces the device-assigned policies regardless of whether or not you are logged in. Therefore, device-assigned policies are enforced for all users of the device.

## 10.2.3 Additional Information


Click [here](#) to view the full ZENworks Adaptive Agent Help file.

# 10.3 Bundles


Software applications and other files are distributed to your **device** as bundles. A bundle contains all of the content (files, etc.) and instructions (registry modifications, shortcut information, etc.) required to install the software on the device.

The Bundles page lets you view the bundles that are assigned to you and your device. Bundles assigned to you are referred to as user-assigned bundles, and bundles assigned to your device are referred to as device-assigned bundles.

## 10.3.1 User-Assigned Bundles

The ZENworks<sup>®</sup> Adaptive Agent displays your user-assigned bundles only when you are logged in to your user directory (Microsoft<sup>\*</sup> Active Directory<sup>\*</sup> or Novell<sup>®</sup> eDirectory<sup>™</sup>). If you are not logged in, you can log in through the ZENworks Configuration Management login page. To do so, right-click the  icon in the notification area, then click Login.

The *User-Assigned Bundles* list displays the following information for each bundle:


- ♦ **Name:** Displays the name of the bundle. You can click the name to display the properties for the bundle, including such information as the version, folder and icon locations, and help contacts.
- ♦ **Status:** Displays the installation status for the bundle.
- ♦ **Effective:** Displays whether or not the bundle can be used on the device. If the *Effective* box is selected, the bundle meets all system requirements and schedule constraints to be used. You can click the bundle icon  to launch the bundle.

If the box is not selected, it cannot be used; to find out why, click the bundle name to display the system requirements and schedule properties.

## 10.3.2 Device-Assigned Bundles

The Adaptive Agent always displays the device-assigned bundles regardless of whether or not you are logged in. Device-assigned bundles can be launched by anyone who uses your device.

The *Device-Assigned Bundles* list displays the following information for each bundle:

- ♦ **Name:** Displays the name of the bundle. You can click the name to display the properties for the bundle, including such information as the version, folder and icon locations, and help contacts.
- ♦ **Status:** Displays the installation status for the bundle.
- ♦ **Effective:** Displays whether or not the bundle can be used on the device. If the *Effective* box is selected, the bundle meets all system requirements and schedule constraints to be used. You can click the bundle icon  to launch the bundle.

If the box is not selected, it cannot be used; to find out why, click the bundle name to display the system requirements and schedule properties.

### 10.3.3 Additional Information

Click [here](#) to view the full ZENworks Adaptive Agent Help file.

## 10.4 Inventory

The ZENworks® Adaptive Agent scans your **device** for software and hardware information on a regular schedule established by your administrator.

The Inventory page lets you quickly find out details about your device, such as its asset tag number, IP address, total memory, and free disk space. You can view hardware details, such as the manufacturer and model of your hard drives, disk drives, and video card. You can also view software details, such as installed Windows\* hot fixes and patches and the version numbers and locations of installed software products.

### 10.4.1 Scan Schedule

The scheduled date and time when the ZENworks Adaptive Agent scans your device. The scan schedule is established by your administrator.

### 10.4.2 Scan Now

Click *Scan Now* to manually initiate a scan of your device. This option is configured by your administrator, which means that it might not be available.

### 10.4.3 Next Scan

The date and time of the next scheduled scan.

### 10.4.4 Last Scan

The date and time of the last scan.

### 10.4.5 Last Upload

The date and time the ZENworks Adaptive Agent last transferred the inventory data to the ZENworks Server so that it could be viewed by your administrator in ZENworks Control Center.

## 10.4.6 Inventory Summary

Selected details about your device. More complete details are available by clicking *View Inventory Details*.

## 10.4.7 View Inventory Details

Click *View Inventory Details* to see hardware details, such as the manufacturer and model of your hard drives, disk drives, and video card.

You can also view software details, such as installed Windows hot fixes and patches and the version numbers and locations of installed software products.

## 10.4.8 Additional Information

Click [here](#) to view the full ZENworks Adaptive Agent Help file.

# 10.5 Logging

While performing tasks on your **device**, the ZENworks® Adaptive Agent generates messages to track its activity. Each message is assigned a severity level: information, warning, error, or debug.

The Logging page displays the location of the log file and lets you determine the what level of messages are logged to the file.

## 10.5.1 Message Log

The following fields provide information about the message log:

- ♦ **Location of Log File:** The name and location of the local log file. The log file, `zmd-messages.log`, is stored in the program files\novell\zenworks\logs\localstore directory on the root of the system drive (for example, `c:\program files\novell\zenworks\logs\localstore\zmd-messages.log`). You can view the file with a text editor.  
  
Backup log files are stored in the same directory as incremented ZIP files (for example, `zmd-messages.log.1.zip` and `zmd-messages.log.2.zip`)
- ♦ **Managed: level:** Sets the logging severity level at the level defined in the ZENworks Zone by the administrator, where *level* represents the level (Info, Warning, Error, and Debug).
- ♦ **Log Messages if Severity Is:** Determines which messages are saved to the log file. The severity levels are:
  - ♦ **Managed: level:** Sets the logging severity level at the level defined in the ZENworks Zone by the administrator, where *level* represents the level (Info, Warning, Error, and Debug).
  - ♦ **Error:** Logs error messages only. Error messages are generated whenever the Adaptive Agent is unable to perform a requested task.
  - ♦ **Warning and Above:** Logs warning and error messages. Warning messages are generated whenever the Adaptive Agent encounters a problem that might result in failure of a task.

- ♦ **Information and Above:** Logs informational, warning, and error messages. Informational messages are generated whenever the Adaptive Agent performs a task to show that the normal process is taking place.
- ♦ **Debug:** Logs all available messages to enable debug tracing of a problem. This level significantly increases the log file size and should be used only under the direction of your administrator.

## 10.5.2 Log Collection Server

The following fields provide information about the ZENworks Server that collects the log file so that the log messages can be displayed in ZENworks Control Center for viewing by your administrator.

- ♦ **Server URL:** Specifies the URL of the ZENworks Server that collects the log information.
- ♦ **Next Log Transmission:** Specifies the next date and time that the log file will be rolled up to the collection server.

## 10.5.3 Additional Information

Click [here](#) to view the full ZENworks Adaptive Agent Help file.

# 10.6 Remote Management - Security

The Security page provides options that help you ensure the security of your **device** during Remote Management operations.

The security settings are controlled by your administrator and might not be available for you to use.

## 10.6.1 Set Password

You can set the password only if the *Allow user to set password on the managed device* option is enabled for the managed device. There are two types of password:

- ♦ **ZENworks® password:** This password is used in ZENworks password-based authentication. It can be up to 255 characters long.
- ♦ **VNC password:** This password is used in VNC password-based authentication. It can be up to 8 characters long.

The ZENworks password authentication is recommended because it is more secure than the VNC password-based authentication. Use the VNC password-based authentication for interoperability with open source VNC viewers.

## 10.6.2 Clear Password

Clears the selected password.

### 10.6.3 Enable Accepting Connections If Currently Blocked Due to Intruder Detection

If a remote operator's attempt to log in fails a certain number of times (the default is 5), remote connections are disabled. Connections are automatically allowed again after a specific amount of time (the default is 10 minutes); however, you can click this option to manually enable connections.

### 10.6.4 Display Audit Information

Displays the following information for the remote operations that have been performed on your device.

Field	Description
<i>ZENworks User</i>	Name of the ZENworks® user logged in when the remote operation took place.
<i>Remote Operator</i>	Name of the remote operator who performed the operation.
<i>Console Machine</i>	Name of the device from which the remote operation was performed.
<i>Console IP</i>	IP address of the device from which the remote operation was performed.
<i>Operation</i>	The type of operation performed: Remote Control, Remote Execute, Remote View, Remote Diagnostics, File Transfer, or Security.
<i>Start Time</i>	The time when the remote operation began.
<i>End Time</i>	The time when the remote operation finished.
<i>Status</i>	The status of the remote operation: Success, Running, or Failure.

### 10.6.5 Display Fingerprint

Displays the fingerprint for the device's self-signed certificate. A remote operator might ask you for the fingerprint in order to validate the device's credentials before performing a remote operation on the device.

### 10.6.6 Additional Information

Click [here](#) to view the full ZENworks® Adaptive Agent Help file.

## 10.7 Remote Management - General

The General page lets you view version and status information about the Remote Management module. You can also view a list of currently connected remote operators and request a remote session with an operator.

## 10.7.1 Status

Displays whether Remote Management is currently enabled or disabled on your device. If it is enabled, the status displays the port on which the Remote Management service is running.

## 10.7.2 Version

Displays the current version of the Remote Management module.

## 10.7.3 Optimization

Displays if optimization is enabled or disabled for Remote Management. The Remote Management module's performance will be optimized if the video card on your device is compatible with the performance enhancement driver that is installed with the Remote Management module.

## 10.7.4 Request Remote Management Session

You can request the remote operators configured in the effective Remote Management policy to perform a remote session on the managed device. Alternatively, you may also enter a remote operator's details such as the hostname and the port to request for a Remote Management session.

## 10.7.5 List Connected Remote Operators

Displays a list of the connected Remote operators, IP Address, Operation, Session Start Time and Session Duration.

## 10.7.6 Additional Information

Click [here](#) to view the full ZENworks® Adaptive Agent Help file.

# 10.8 Remote Management - Policy

The Policy page displays the Remote Management policy settings that are currently in effect for your [device](#). You cannot change the policy settings; only the ZENworks® administrator can change them in ZENworks Control Center.

Click a policy category (*General, Remote Control, Remote View, Remote Execute, File Transfer, Remote Diagnostics, Security*) to view the settings for that category. For a description of each setting, see the *Policy Management* guide on the [ZENworks 10 Configuration Management documentation Web site \(http://www.novell.com/documentation/zcm10\)](http://www.novell.com/documentation/zcm10).

Click [here](#) to view the full ZENworks Adaptive Agent Help file.

# 10.9 Bundle Properties

The Properties page provides information about the bundle.



## 10.9.1 General








Displays the following information:

- ♦ **Zone:** The Management Zone in which the device and bundle are located.
- ♦ **GUID:** The global unique identifier assigned to the bundle. The identifier always remains the same, even if the bundle's name changes.
- ♦ **Version:** The version of the bundle. Version 0 and above are valid version numbers.
- ♦ **Folder:** The folder in which the bundle resides. This folder structure appears in the ZENworks<sup>®</sup> Window, the ZENworks Explorer, and the Start Menu.
- ♦ **Description:** Any information your administrator provided about the bundle.

## 10.9.2 Status

Displays the following information:

- ♦ **Assignment:** Whether the bundle is assigned to the device or to the logged-in user.
- ♦ **Status:** The current status. The following table shows the bundle icons using the default light blue background icon. Your administrator might choose to use a different background icon; however, the status icons such as  and , remain the same.

Icon	Status
	Available. You can launch the bundle.
	Unavailable. You cannot launch the bundle. Either the device does not meet the system requirements established for the bundle or the bundle is not scheduled to be available at the current time.
	Downloading. The bundle is downloading from the network location where it is stored.
	Installing. The bundle is installing to the device.
	Running. The bundle is currently running.
	Uninstalling. The bundle is being removed from the device.
	Not Installed. The bundle failed to install. Right-click the icon, then click <i>Verify</i> to repair the bundle.

- ♦ **Location:** The locations (Desktop, Quick Launch toolbar, Start Menu, System Tray/ Notification Area, ZENworks Window) where the bundle icon is displayed.

### 10.9.3 Help Contacts

Displays the name, phone, number, and e-mail address of any individuals you can contact for help with the bundle.

### 10.9.4 System Requirements

The *System Requirements* tab displays only if the bundle does not meet one or more of the requirements established by the ZENworks administrator.

The system requirements tree displays any bundle requirements that your device does not meet. The bundle is not distributed to your device until the requirements are either met or changed.

### 10.9.5 Time Schedule

The *Time Schedule* tab displays only if your ZENworks administrator has created an Availability schedule for the bundle. The Availability schedule determines the dates and times when the bundle is available for you to use.

### 10.9.6 Additional Information

Click [here](#) to view the full ZENworks Adaptive Agent Help file.

## 10.10 Satellite - General

The General page lets you view a device's general properties, including its current status, port, content replication schedule, and satellite role status.

If your ZENworks® administrator has specified that this device performs satellite roles, the information on this page lets you view the device's general information; however, you cannot edit the fields on this page.

A managed device with satellite roles can perform certain roles that a ZENworks Primary Server normally performs. Any managed device (server or workstation) can perform satellite roles. When the administrator configures the device, the administrator specifies the roles it performs. Satellite roles help to minimize WAN traffic in the ZENworks system.

A device with satellite roles can perform the following roles:

- ♦ **Collection:** To improve information roll-up access for a group of devices and to minimize traffic to the ZENworks Primary Server that is hosting the ZENworks database, the ZENworks administrator can enable the Collection role on a device, and designate your device as a Collection Point.
- ♦ **Content:** ZENworks Configuration Management supports distributing bundles and policies from ZENworks Servers or from other devices that are designated as Distribution Points. Your administrator controls whether or not your device is a Distribution Point.
- ♦ **Imaging:** The Imaging role installs the Imaging services and adds the Imaging role to the device. With this role, the device can be used as an Imaging server to perform all the Imaging operations, such as taking an image and applying the image within or across subnets by using unicast or multicast imaging. Your administrator controls whether or not your device has the imaging role.



### **10.10.1 Current Status**

Displays whether your device is currently configured to perform satellite roles.

### **10.10.2 Port**

Displays the port that the device is using.

### **10.10.3 Content Replication Schedule**

Displays how often the device's content is updated from the parent Primary Server. By default, a Content role device checks for new or removed content every 5 minutes. Your ZENworks administrator can change this schedule. For example, your administrator might want to increase the time between cycles if the ZENworks system is not adding content to your system very often or if the connection between the Content role device and its parent Primary Server is slow.

### **10.10.4 Satellite Role Status**

Displays the roles that the device is performing (Collection, Content, and Imaging) and its current status (Active or Inactive).

## **10.11 Satellite - Collection Role Properties**

This page lets you view a device's Collection Point properties, including its current status, parent URLs, and collection schedule; however, you cannot edit the fields on this page.

ZENworks® Configuration Management lets your ZENworks administrator enable the Collection role on a device. This improves information roll-up access for a group of devices and minimizes traffic to the ZENworks Primary Server that is hosting the ZENworks database. The information that is rolled up includes device inventory information, messages (errors, warning, informational, and so forth), and policy and bundle statuses. Your administrator controls whether or not your device is a Collection Point.

### **10.11.1 Current Status**

Displays whether your device is currently configured to function as a Collection Point.

### **10.11.2 Parent URLs**

Displays the URLs for this device's parent ZENworks servers.

### **10.11.3 Collection Schedule**

Displays how often the collected data is rolled up from the devices that use it as a collection device. Your ZENworks administrator can change this collection schedule.

## 10.12 Satellite - Content Role Properties

ZENworks® Configuration Management supports distributing bundles and policies from ZENworks Servers or from other **devices** that are designated as Distribution Points. Your administrator controls whether or not your device is a Distribution Point.

If your device is serving as a Distribution Point, you can view statistical information about the number of times it has been accessed and the content (bundles and policies) that is stored on it.

### 10.12.1 Current Status

The status of the Distribution Point module. If the *Stopped* status is displayed, your device is currently not serving as a Distribution Point.

### 10.12.2 Port

The port being used by the Distribution Point module.

### 10.12.3 Repository File Count

The number of bundle and policy files being stored in the repository on your device.

### 10.12.4 Repository Size

The amount of disk space being used by the repository.

### 10.12.5 Unique Device Accesses

The number of different devices that have accessed content from the repository on your device. This number represents the total unique accesses since the last time the *Clear History* option was used to reset the number to 0.

### 10.12.6 Number of Files Served

The number of bundle and policy files delivered to other devices. This number represents the total number of files transferred since the last time the *Clear History* option was used to reset the number to 0.

### 10.12.7 Size of Data Served

The total amount of data delivered to other devices. This amount represents the total amount of data transferred since the last time the *Clear History* option was used to reset the amount to 0.

### 10.12.8 Number of Errors

The total number of errors encountered while transferring files. Click the *Export History* option to export transactions to a CSV file that you can use to examine the errors.

## 10.12.9 Actions

Click *Export History* to export the information from the *Recent Access History* list to a CSV file. Click *Clear History* to clear the information from the list and to reset the *Unique Device Accesses*, *Number of Files Transferred*, *Amount of Data Transferred*, and *Number of Errors* fields to 0.

## 10.12.10 Recent Access History

A listing of the last 10 devices to access the repository. The list shows only the 10 most recent accesses. However, all entries are saved until the history is cleared. You can **export the history** to view all of the saved entries.

## 10.12.11 Content Repository Details

A listing of the bundles and policies stored in the repository.

## 10.12.12 Additional Information

Click [here](#) to view the full ZENworks Adaptive Agent Help file.

# 10.13 Satellite - Imaging

This page lets you view a device's imaging role properties, including its current status, PXE service status, image files and imaging statistics; however, you cannot edit the fields on this page.

ZENworks® Configuration Management lets your ZENworks administrator enable the Imaging role on a device. With this role, the device can be used as an Imaging server to perform all Imaging operations, such as taking an image and applying the image within or across subnets by using unicast or multicast imaging. Your administrator controls whether or not your device has the Imaging role.

## 10.13.1 Current Status

Displays whether your device is currently configured to perform Imaging operations. The current status is *Active* when the device is promoted to Satellite Server with Imaging role.

## 10.13.2 PXE Service Status

Displays whether the Proxy DHCP service is enabled on the device.

## 10.13.3 View Image Files

Displays the image files stored in the `%ZENWORKS_HOME%\work\content-repo\images` directory.

## 10.13.4 Imaging Statistics

Displays the following information:

- ♦ **PXE Requests:** The number of imaging requests of any kind that have been received by the Imaging Server since it was last started. This includes requests that failed, were denied, or were referred to other Imaging Servers. Information about each of these requests, such as the source, type, date/time, and results, is logged on the Imaging Server.
- ♦ **Images Sent:** The number of images that the Imaging Server has sent to imaging clients since the Imaging Server was last started. This includes only images that were retrieved from this Imaging Server.
- ♦ **Images Received:** The number of new images that have been received and stored on the Imaging Server since it was last started. This includes images that were received through client referrals.